


注1)浴槽の高さが上方5.0m以上の場合は、給水圧が200kPa以上必要です。
注2)配管延長が15mを超える場合は、給水圧が150kPa以上必要です。



注)
トリイ配管
の場合

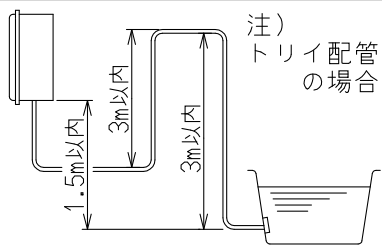

The diagram shows a cross-section of a water tank. Inside the tank, there are several horizontal lines representing water. A float valve is attached to the bottom of the tank, and a pipe extends from it, leading to a drain or overflow point outside the tank.

Technical drawing of a bracket with dimensions and labels:

- $\phi 5.5$ 穴 (2ヶ所)
- 5.5X16長穴 (6ヶ所)
- 100
- 70
- 40
- 4
- 12.3
- 18
- 24.5
- 37
- 60
- 18
- 17
- $\phi 6 \times 10$ 長穴 (2ヶ所)
- 取付金具上
- 尺度：フリー

